


critical specification data sheet

The BF1500L

Bag Filter Unit

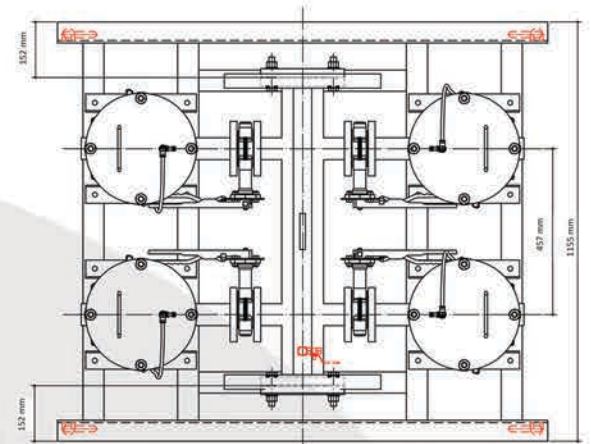


Overview:

The BF1500L bag filter unit features four bag filter tanks and utilises 178 x 762 mm bag filters for superior filtration from 100 to 1 micron for flows up to 1500 L/min.



Features and Benefits:

- No moving parts
- Skid mounted
- Fitted with bleed valves and pressure gauges
- Chambers constructed of stainless steel
- Piping constructed of stainless steel
- Stainless steel inlet and outlet manifolds
- System can stand alone for sediment removal or be used in combination with filter equipment
- ASME and CE certified
- Manufactured in a ISO9001 certified manufacturing facility

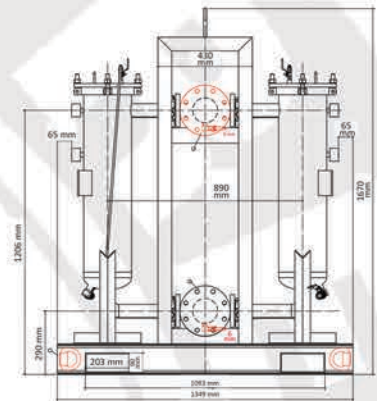

Specification:

Max Flow	1500 L/min
Material	stainless steel
Max Pressure	150 psi / 10.34 bar
Dry Weight	523 kg
Footprint	1349mm x 1155mm
Inlet / outlet	6" x 6" flange

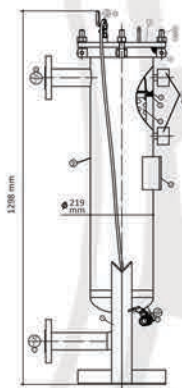

Accessories:

- Spillguard
- Suction and discharge hoses



0845 900 2841
rainforrent.co.uk

Liquid Ingenuity®